


ARDA



Stylish park luminaires are made of die-cast aluminum with high luminous efficiency. The classic appearance combined with modern technology makes them attractive.

**Example applications:**  
Streets, parks, gardens.


Name	Power [W]	Luminous flux	Protection class	IP	IK	CRI	CCT	Luminous efficiency up to
ARDA Frosted	15-40	1 725-4 600 lm	I	IP66	IK08	>70	4000K	115 lm/W

\* The power range given in the table is not adjustable. Select a constant power value within the given range every 5W.


**Installation:** pole  $\varnothing 60\text{mm}$   
**Supply voltage:** 230V AC / 50-60Hz  
**Ambient temperature range:**  $-30^{\circ}\text{C} \dots +35^{\circ}\text{C}$   
**Lifetime L80B50:** 80 000h  
**Power factor:**  $>0,9$   
**Surge protection:** 10kV  
**Wind exposed surface:**  $0,174 \text{ m}^2$   
**Housing:** aluminum, tempered glass  
**Power Supply:** DALI driver in option  
**Warranty:** 5 years

#### Dimensional drawing:

Name	H	W	Weight
ARDA	820	420	8 kg

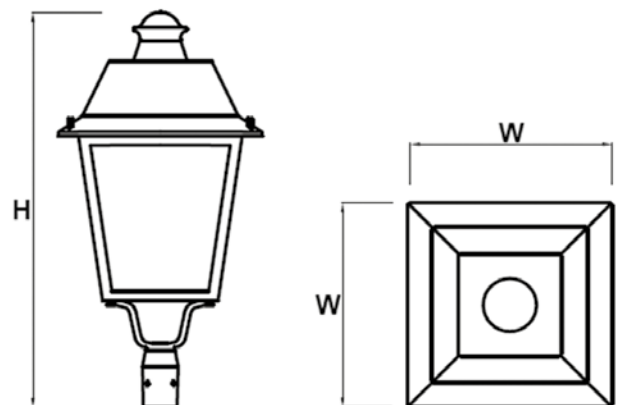

#### Light beam curves:

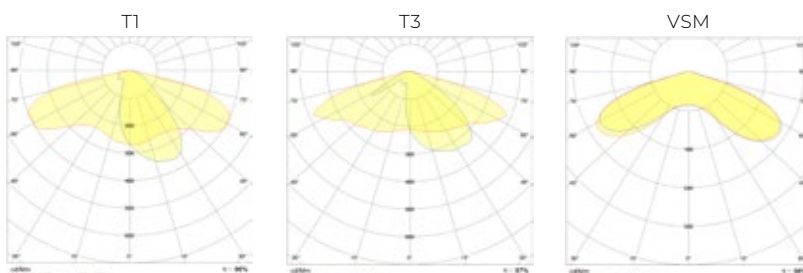

Luminous flux tolerance  $\pm 10\%$   
 Our products are constantly upgraded. We reserve right to any construction changes without previous notice.