


AURE 2



The AURE series luminaires are designed for linear lighting. The luminaire is made of anodized aluminium and tempered glass. AURE is also available with optics.

Example applications:

Industrial, commercial, production facilities, communication routes.

Name	Power [W]	Luminous flux	Protection class	IP	IK	CRI **	CCT	Luminous efficiency up to*
AURE 2	60	10 500 lm	I	IP66	IK10	>70 / >80	4000K	175 lm/W
AURE 2	120	21 600 lm	I	IP66	IK10	>70 / >80	4000K	180 lm/W
AURE 2	180	32 400 lm	I	IP66	IK10	>70 / >80	4000K	180 lm/W
AURE 2	240	43 200 lm	I	IP66	IK10	>70 / >80	4000K	180 lm/W
AURE 2	300	54 000 lm	I	IP66	IK10	>70 / >80	4000K	180 lm/W

* Frosted glass - Luminous efficiency is lower around 8%

** CRI >80 - Luminous efficiency is lower around 5%

Different parameters on request.

Installation: suspended / surface mounted / adjustable/ accessory

Supply voltage: 230V AC / 50-60Hz

Ambient temperature range: -35°C...+50°C

Lifetime L80B50: 80 000h

Power factor: >0,9


Housing: aluminum, tempered glass

Power Supply: DALI driver in option


Warranty: 5 years

Dimensional drawing:


Name	L	H	G	W	Weight
AURE 2 60	308	99	64	223	3 kg
AURE 2 120	608	99	64	223	5,4 kg
AURE 2 180	908	99	64	223	7,8 kg
AURE 2 240	1208	99	64	223	10 kg
AURE 2 300	1508	99	64	223	12,2 kg

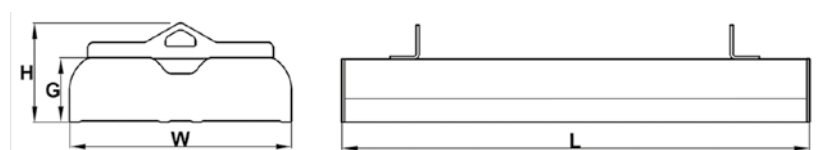

Light beam curves:

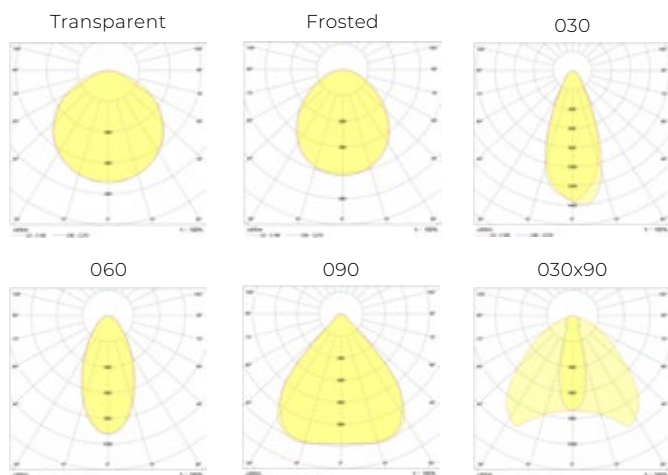

Accessories:

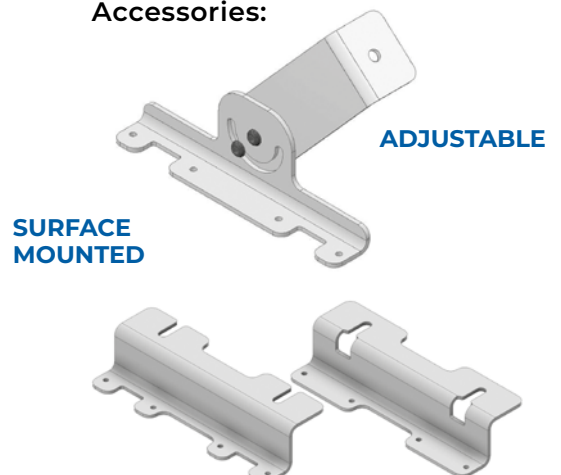

Luminous flux tolerance +/-10%

Our products are constantly upgraded. We reserve right to any construction changes without previous notice.