


ELRONDA



ELRONDA is a family of surface mounted luminaires. Due to unique design that include optical lenses it achieves superior efficiency. ELRONDA luminaires ensure subtle visible effect that meet the most demanding requirements.

Example applications:

Offices, classrooms, staircases, public usage interiors

Name	Power [W]	Luminous flux	Protection class	IP	IK	CRI	CCT	Luminous efficiency up to
ELRONDA	5	750 lm	I	IP20	IK05	>80	4000K	150 lm/W
ELRONDA	10	1 550 lm	I	IP20	IK05	>80	4000K	155 lm/W
ELRONDA	18	2 880 lm	I	IP20	IK05	>80	4000K	160 lm/W

Different parameters on request.

Installation: surface mounted

Supply voltage: 230V AC / 50-60Hz

Ambient temperature range: 0°C...+40°C

Lifetime L80B50: 100 000h

Power factor: >0,9



Housing: aluminum, powder coated, PMMA

Warranty: 5 years

Dimensional drawing:

Name	L	H	Weight
ELRONDA 5	170	30	0,4 kg
ELRONDA 10	222	30	0,7 kg
ELRONDA 18	300	30	1 kg

Light beam curves:

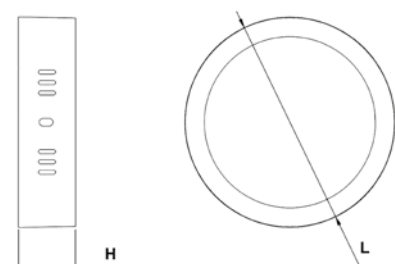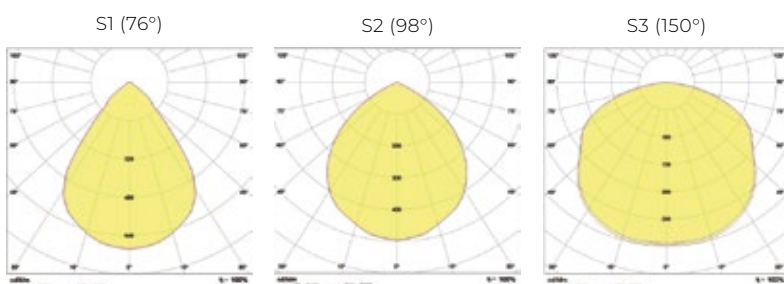

Luminous flux tolerance +/-10%

Our products are constantly upgraded. We reserve right to any construction changes without previous notice.