


ELRONDE



ELRONDE is a family of recess luminaires. Due to unique design that include optical lenses it achieves superior efficiency. ELRONDE luminaires ensure subtle visible effect that meet the most demanding requirements.

Example applications:

Offices, classrooms, staircases, public usage interiors

Name	Power [W]	Luminous flux	Protection class	IP	IK	CRI	CCT	Luminous efficiency up to
ELRONDE	5	750 lm	I	IP20 / IP44	IK05	>80	4000K	150 lm/W
ELRONDE	10	1 550 lm	I	IP20 / IP44	IK05	>80	4000K	155 lm/W

Different parameters on request.

Installation: recess

Supply voltage: 230V AC / 50-60Hz

Ambient temperature range: 0°C...+40°C

Lifetime L80B50: 100 000h

Power factor: >0,9



Housing: aluminum, powder coated, PMMA

Warranty: 5 years

Dimensional drawing:

Name	L	H	Weight
ELRONDE 5	170	45	0,5 kg
ELRONDE 10	222	45	0,7 kg

Light beam curves:

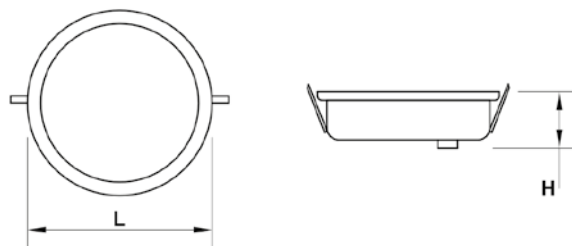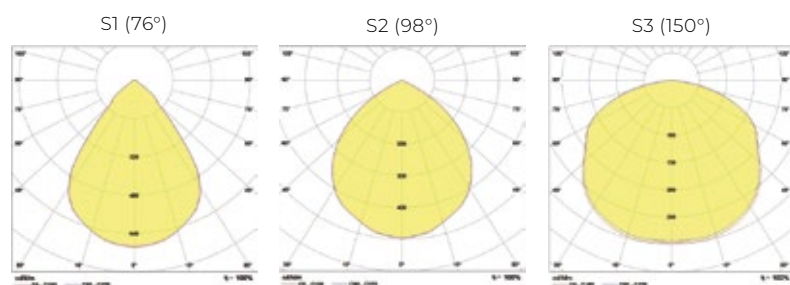

Luminous flux tolerance +/-10%

Our products are constantly upgraded. We reserve right to any construction changes without previous notice.