


GEBIRA



GEBIRA is a family of surface mounted luminaires with extraordinary design and superior efficiency. It is an interesting alternative for modern interiors.

Example applications:

Offices, classrooms, staircases, public usage interiors.

Name	Power [W]	Luminous flux	Protection class	IP	IK	CRI	CCT	Luminous efficiency up to
GEBIRA	5	750 lm	I	IP20	IK05	>80	4000K	150 lm/W
GEBIRA	10	1 550 lm	I	IP20	IK05	>80	4000K	155 lm/W
GEBIRA	18	2 880 lm	I	IP20	IK05	>80	4000K	160 lm/W

Different parameters on request.

Installation: surface mounted

Supply voltage: 230V AC / 50-60Hz

Ambient temperature range: 0°C...+40°C

Lifetime L80B50: 100 000h

Power factor: >0,9



Housing: aluminum, powder coated, PMMA

Warranty: 5 years

Dimensional drawing:

Name	L	H	Weight
GEBIRA 5	170	30	0,5 kg
GEBIRA 10	222	30	0,8 kg
GEBIRA 18	300	30	1 kg

Light beam curves:

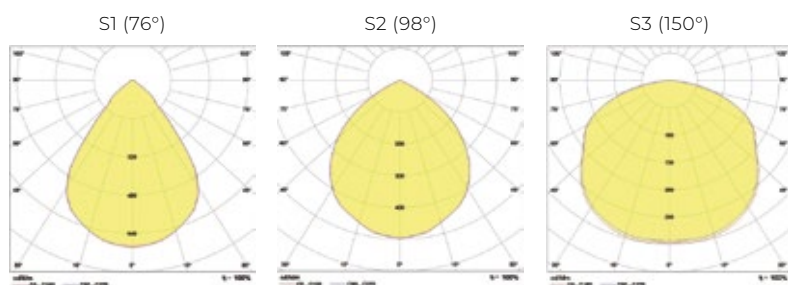

Luminous flux tolerance +/-10%

Our products are constantly upgraded. We reserve right to any construction changes without previous notice.