


STR



STR N0



STR is a family of street luminaires that will find a wide range of use in outdoor lighting: city roads, housing estates and car parks. The luminaires are excellent technical parameters and modern design. Double chamber construction additionally protects electronic devices inside the fixture. The newest generation LEDs as well as individually designed power supplies guarantee high luminous efficiency of STR luminaires.

Example applications:

Streets, parking lots, industrial and commercial areas, bicycle paths, etc.

Name	Power [W]	Luminous flux	Protection class	IP	IK	CRI	CCT	Luminous efficiency up to
STR N0	35	5600 lm	I / II	IP65	IK09	>70	4000K	160 lm/W

Different parameters on request.

Installation: pole Ø48mm, on the boom Ø48mm, angle adjustment 0°/+15°, 90°/+15°

Supply voltage: 230V AC / 50-60Hz

Ambient temperature range: -30°C...+40°C

Lifetime L90B10: >60 000h; (Ta 25°C)

Power factor: >0,9

Surge protection: 6kV

Wind exposed surface: 0,018m²

Housing: aluminum, tempered glass


Power Supply: DALI driver in option

Warranty: 5 years


Dimensional drawing:

Name	L	W	H	Weight
STR N0	507	210	143	3 kg

STR N0

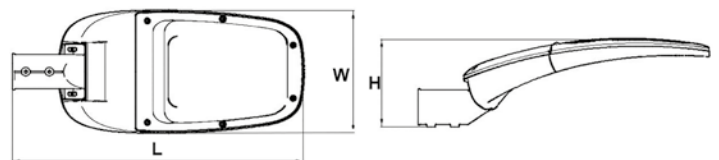

Light beam curves:

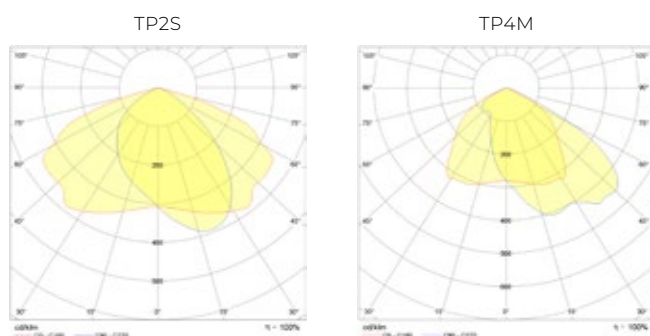

Luminous flux tolerance +/-10%

Our products are constantly upgraded. We reserve right to any construction changes without previous notice.