


# TEREVO



TEREVO is a linear LED luminaire with simple and elegant design. It is mainly suitable for office lighting, but thanks to its increased IP ratio works well as an industrial lamp.

### Example applications:

Offices, conference rooms, classrooms, work stations, warehouses.

Name	Power [W]	Luminous flux	Protection class	IP	IK	CRI	CCT	Luminous efficiency up to
TEREVO 600	20/40	2100/4200 lm	I	IP40	IK08	>80	4000K	105 lm/W
TEREVO 1200	40/80	4200/8400 lm	I	IP40	IK08	>80	4000K	105 lm/W
TEREVO 1800	60/120	6300/12600 lm	I	IP40	IK08	>80	4000K	105 lm/W
TEREVO 2400	80/160	8400/16800 lm	I	IP40	IK08	>80	4000K	105 lm/W
TEREVO 3000	100/200	10500/21000 lm	I	IP40	IK08	>80	4000K	105 lm/W
TEREVO 3600	120/200	12600/21000 lm	I	IP40	IK08	>80	4000K	105 lm/W

Different parameters on request.

**Installation:** suspended

**Supply voltage:** 230V AC / 50-60Hz

**Ambient temperature range:** 0°C...+40°C

**Lifetime L80B50:** 50 000h

**Power factor:** >0,9

**Housing:** anodized aluminum, PMMA

**Warranty:** 5 years

### Accessories:





**SUSPENSION**

### Dimensional drawing:

Name	L	W	H	Weight
TEREVO 600	625	51	102	1,5 kg
TEREVO 1200	1225	51	102	3,0 kg
TEREVO 1800	1825	51	102	4,8 kg
TEREVO 2400	2425	51	102	6,5 kg
TEREVO 3000	3025	51	102	8,0 kg
TEREVO 3600	3625	51	102	9,7 kg

### Typical application:

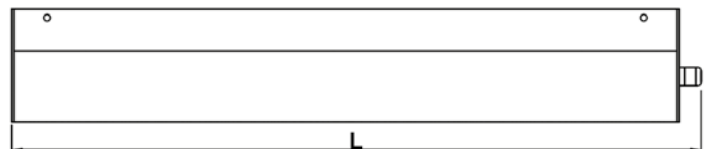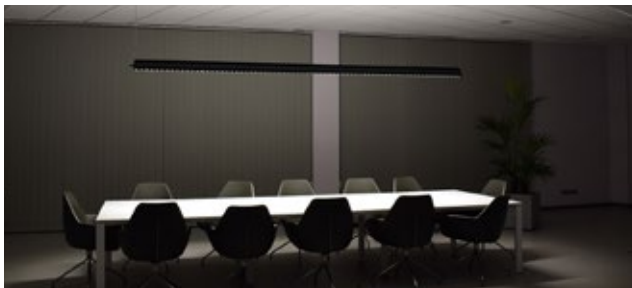





### Light beam curves:

Office Perfand LED in Trzebnica.

Cover Frosted (100\*)

S1m

S2m

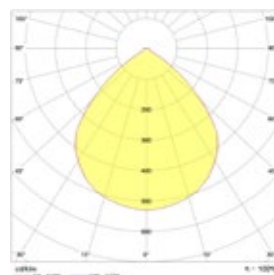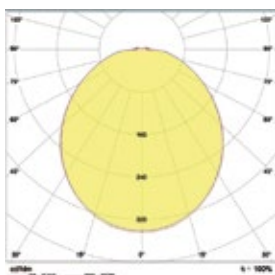

Luminous flux tolerance +/-10%

Our products are constantly upgraded. We reserve right to any construction changes without previous notice.