


TALO



TALO is a classic and effective LED luminaire dedicated to rooms with suspended ceilings. Simple and minimal to impress a mediocre and aesthetic finish for a suspended ceiling structure.

Application example:

Public utility facilities, offices, conference rooms, classrooms, corridors..



Name	Power	Luminous flux	Protection class	IP	IK	CRI	CCT	Luminous efficacy
TALO	40W	4 000 lm	II	20	06	>80	4000 K	100 lm / W

Technical parameters:

Power supply: 230 V AC / 50-60 Hz

Working temperature: 0°C... +40°C

Lifetime: > 30 000 h


Power factor: >0,9

Installation: directly in the ceiling


Housing: steel sheet, PMMA

Warranty: 3 years

Light distribution curves:

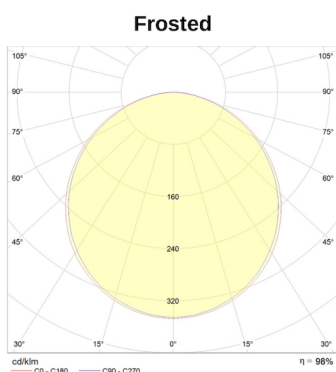

Dimensional drawing:

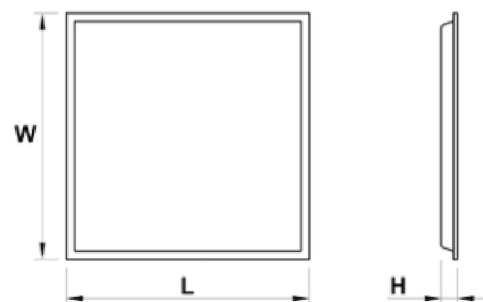

NAME	L (mm)	W (mm)	H (mm)	WEIGHT (kg)
TALO	595	595	30	2,10