

UNIVA




UNIVA is a decorative surface mounted luminaire. A simple, elegant casing, as well as good technical parameters make UNIVA an excellent proposition that will work well in public spaces.



Application example:

Offices, classrooms, conference rooms, corridors, public buildings.



Name	Power	Luminous flux	Protection class	IP	IK	CRI	CCT	Luminous efficacy
UNIVA	18 W	1 800 lm	II	20	06	>80	4000 K	100 lm / W

Technical parameters:

Power supply: 230 V AC / 50-60 Hz

Working temperature: 0°C... +40°C

Lifetime: > 25 000 h

Power factor: >0,9


Installation: surface

Housing: PC


Warranty: 2 years

Light distribution curves:

Frosted



Dimensional drawing:

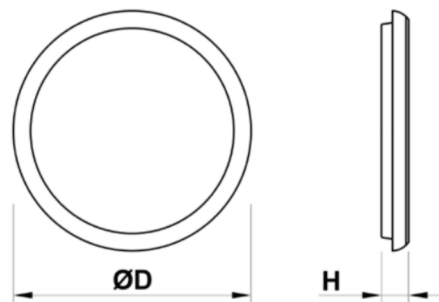

NAME	D (mm)	H (mm)	WEIGHT (kg)
UNIVA	293	28	0,65